

TELESEISMIC BODY WAVE INVERSION

Moshou A.¹, Papadimitriou P.¹, and Makropoulos K.¹

¹ National and Kapodistrian University of Athens, Faculty of Geology and Geoenvironment,
Department of Geophysics – Geothermics amoshou@geol.uoa.gr, ppapadim@geol.uoa.gr,
kmacrop@geol.uoa.gr

Abstract

Body wave inversion methodology is developed to determine the earthquake source parameters in teleseismic distances. The generalized inversion technique, based on the singular value decomposition method, is applied to determine the deviatoric moment tensor which is decomposed in two parts. The first one is related to the pure Double Couple (DC) and the second one to the compensated linear vector dipoles (CLVD). The best solution of the overdetermined problem is obtained by minimizing the misfit between observed and synthetic seismograms. The proposed methodology is applied for the four strongest earthquakes that occurred recently in Greece (2001-2006).

Key words: focal mechanism, moment tensor inversion, body waves

Περίληψη

Στην παρούσα εργασία αναπτύσσεται μια μεθοδολογία με στόχο να προσδιορισθούν οι σεισμικές παράμετροι αντιστρέφοντας χωρικές κυματομορφές σε τηλεσεισμικές αποστάσεις. Κατά την αντιστροφή τα δεδομένα συνήθως είναι περισσότερα από τους αγνώστους με αποτέλεσμα το σύστημα να είναι υπερκαθορισμένο. Για το λόγο αυτό γίνεται χρήση της γενικευμένης αντιστροφής βάση της μεθόδου ανάλυσης ιδιαιζουσών τιμών. Από την αντιστροφή υπολογίζεται ο γενικευμένος τανυστής της σεισμικής ροπής, ο οποίος στη συνέχεια διαχωρίζεται σε δύο μέρη από τα οποία το κύριο εκφράζει τη διαδικασία διάρρηξης. Η προτιμητέα λύση είναι αυτή που επιτυγχάνεται ελαχιστοποιώντας τη διαφορά μεταξύ των παρατηρούμενων και συνθετικών κυματομορφών. Η προτεινόμενη μεθοδολογία εφαρμόστηκε για τους τέσσερις μεγαλύτερους σεισμούς που συνέβησαν στον Ελληνικό χώρο από το 2001 έως και το 2006.

Key words: Μηχανισμός Γένεσης, Αντιστροφή Τανυστή Σεισμικής Ροπής, Κύματα χώρου

1. Introduction

The study of the rupture process is important to understand the source properties of an earthquake. The moment tensor, as a mathematical description of equivalent forces and moments in a point source, is used to study the source processes. The source mechanism can be decomposed into basic models of fracture mechanics, using eigenvalue analysis (Jost and Hermann, 1989). A complete inversion implies knowledge of the moment tensor components, the depth and the source time function of the event (Aki and Richards, 1980).

Eigenvalue and eigenvector analysis of the moment tensor can be used to determine the components of the moment tensor. In the case where the sum of the eigenvalues vanishes, the

moment tensor has only deviatoric components. Furthermore, if one eigenvalue is equal to zero the deviatoric moment tensor represents a pure double couple. On the other hand, if no eigenvalue vanishes and their sum still equals zero, the moment tensor can be decomposed into a double couple (DC) and a compensated linear vector dipole (CLVD). In general, a complete moment tensor is the superposition of the two vector dipoles (DC and CLVD) and an isotropic component (Lay and Wallace, 1995). In the case of an earthquake the isotropic part is zero.

Different methods are developed both in time (Kanamori, 1972; Langston and Helmberger, 1975; Madariaga and Papadimitriou, 1985; Hartzell and Heaton, 1983; Nabelek, 1984; Papadimitriou, 1988) and in frequency domain (Brune, 1970; Oncescu, 1986). Langston and Barker (1981, 1982) developed a generalized inverse technique based on the moment tensor formalism. Teleseismic body wave inversion methodology was proposed by Kikuchi and Kanamori (1982, 1986 and 1991). In the first paper a numerical method is developed in order to study complex body waves into a multiple shock sequence. Assuming that the events have identical fault geometry and depth, the far field source time function is obtained as a superposition of ramp functions. In the next paper they considered a general case where the rupture process consists of sub events with arbitrary source parameters. In the third paper they developed a method to determine the mechanism and the rupture process considering that the main fault consists of a set of sub faults, each of which could have different focal mechanism.

Taking into account the previous studies, a methodology is developed in order to calculate the source parameters of an earthquake. For this purpose Green's functions are calculated for five elementary types of faulting. The linear combination of these Green's functions produces synthetic seismograms that can directly be compared to the corresponding observed ones. The moment tensor elements are calculated using the SVD method. Finally, the best solution is obtained by minimizing the difference between observed and synthetics. In the last part of the present work the proposed methodology is applied for the four strongest earthquakes that occurred recently in Greece.

2. Moment tensor representation

The description of the physics of seismic sources is of major research interest in seismology. The seismic sources can be represented by equivalent forces, producing displacements on the earth's surface, identical to those created during the physical process at the source. The displacement at the free surface can be expressed as a sum of moment tensor elements times the corresponding Green's function. The displacement field $u_n(x, t)$ using the representation theorem (Aki & Richards, 1980) can be calculated at a position x and time t by the following relation:

$$u_n(x, t) = \int_{-\infty}^{\infty} d\tau \iint_{\Sigma} [u_i(\xi, \tau)] \cdot c_{ijkl} n_j \frac{\partial G_{nk}(x, t - \tau; \xi, 0)}{\partial \xi_l} d\Sigma \quad (1)$$

where $u_i(\xi, \tau)$ is the definition of dislocation, $G_{nk,l}(x, t; \xi, \tau)$ is the partial derivative of Green's tensor expressing the n th component of the displacement response at point x to a point dislocation in the k th direction on a plane normal to the l direction at position ξ . Σ is the fault plane surface, n_j is the j th component of \mathbf{n} which is the vector normal to Σ . c_{ijkl} is the elastic constant tensor of Hooke law, $[u_i(\xi, \tau)] c_{ijkl}$ is the moment density tensor. Taking the derivative with respect to the τ , the following relation is obtained:

$$u_n(x, t) = \iint_{\Sigma} [u_i(\xi, \tau)] \cdot c_{ijkl} \cdot n_j * G_{nk,l} d\Sigma \quad (2)$$

Considering the moment density tensor m_{kl} :

$$m_{kl} \equiv [u_i(\xi, \tau)] \cdot \eta_j \cdot c_{ijkl} \quad (3)$$

the equation (2) becomes:

$$u_n(x, t) = \iint_{\Sigma} m_{kl} * G_{nk,t} d\Sigma \quad (4)$$

The integration of the moment density tensor m_{kl} on Σ defines the moment tensor M_{kl}

$$M_{kl} = \iint_{\Sigma} m_{kl} \cdot d\Sigma \quad (5)$$

Combining the relations (4), (5) the displacement field can be written:

$$u_n(x, t) = M_{kl} * G_{nk,t} \quad (6)$$

The last equation indicates that the displacement in a position x and time t is defined as a convolution between the moment tensor M_{kl} and the partial derivative of Green's tensor. Furthermore, a synthetic seismogram can be calculated at a specific geographical position using the following equation:

$$syn_i(t) = \frac{1}{4\pi\rho c^3} \cdot \frac{g(\Delta, h)}{r_0} \cdot R_i \cdot \dot{M} \left(t - \frac{r}{c} \right) \quad (7)$$

where $g(\Delta, h)$ is the geometric spreading, r_0 is the radius of the earth, ρ is the density at the source, R denotes the radiation pattern in case of P, SH and SV-waves ($i=1, 2, 3$) respectively, c denotes the v_p (P waves) or v_s (S waves) velocity and \dot{M} is the moment rate. The moment tensor is represented by a 3x3 symmetric matrix. Using a set of data which consists of synthetics and the corresponding observed ones, it is possible to construct a $n \times 6$ matrix and, by applying the Generalised Inverse Method, to calculate the source parameters of the event.

3. Inverse Problem

The displacement observations d_i can be defined as the sum of a discrete model specified by a finite number of parameters \mathbf{m}_j , and the Green's functions G_{ij} :

$$d_i = \sum_{j=1}^M G_{ij} m_j \quad (i = 1, 2, \dots, N, j = 1, 2, \dots, M) \quad (8)$$

This can be written as:

$$d = G \cdot m \quad (9)$$

where d is a vector that contains the observed displacements for each station, G is the matrix with columns that are the Green's functions and \mathbf{m} is a vector containing the moment tensor elements (Meju, 1994). More details for the algorithm can be found in Langston et al. (1982). Concerning the problems considered in the present study, it is assumed that a large number of measurements have been made and that the solution of the inversion problem is over-determined (Menke, 1984). In order to solve the equation (9) the inverse matrix $(G^T G)^{-1}$ must be calculated. Different methods can be used, like the Singular Value Decomposition (SVD) or normal equations. Lanczos (1950) found that any matrix G could be decomposed as:

$$G = USV^T \quad (10)$$

where U is an orthogonal matrix which consists of the eigenvectors associated with the nonzero eigenvalues of the square matrix GG^T , S is the diagonal matrix of positive square roots of the non zero eigenvalues of the square matrix GG^T , which are called singular values of G , and V^T is an

orthogonal matrix which consists of the eigenvectors of the square matrix $G^T G$. Then, the model can be calculated by the following formula:

$$m = (G^T G)^{-1} G^T d = G^{-1} \cdot d \quad (11)$$

G^{-1} is the generalized inverse of G and the equation (10) becomes:

$$m = V S^{-1} U^T d \quad (12)$$

The last equation indicates that the model can be determined by calculating the eigenvectors and eigenvalues of the V and U matrices. In this study the Singular Value Decomposition method (SVD) was used. The obtained eigenvectors are parallel to the principal stress axes and the norm of the matrix is equal to the seismic moment. In general, a moment tensor M_{kl} is symmetric and has 6 independent elements (a_m , $m=1,6$). In case of an earthquake the trace must be equal to zero (no isotropic part). The determinant of the matrix must also be equal to zero:

$$\left. \begin{array}{l} \text{Trace}[M_{kl}] = 0 \\ \text{Det}[M_{kl}] = 0 \end{array} \right\} \quad (13)$$

Considering the two mentioned constraints, the obtained moment tensor consists of 5 independent elements. Kikuchi and Kanamori (1991) defined that the moment tensor can be decomposed in 5 elementary moment tensors:

$$M_{kl}^1 = \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}, M_{kl}^2 = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 0 \end{bmatrix}, M_{kl}^3 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 1 \\ 0 & 1 & 0 \end{bmatrix}, M_{kl}^4 = \begin{bmatrix} 0 & 0 & 1 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix}, M_{kl}^5 = \begin{bmatrix} -1 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad (14)$$

In this case the moment tensor M_{kl} can be calculated by the linear combination of the 5 elementary moment tensors mentioned above (Fukushima et al., 1989):

$$M_{kl} = \sum_{m=1}^5 a_m \cdot M_{kl}^m \quad (15)$$

and using the coefficient a_m the above relation becomes (Kikuchi & Kanamori, 1991):

$$M_{kl} = \begin{bmatrix} \alpha_2 - \alpha_5 + \alpha_6 & \alpha_1 & \alpha_4 \\ \alpha_1 & -\alpha_2 + \alpha_6 & \alpha_3 \\ \alpha_4 & \alpha_3 & \alpha_5 + \alpha_6 \end{bmatrix} \quad (16)$$

where $a_6=0$ (isotropic part). In summary, by creating five elementary Green functions it is possible to calculate a synthetic seismogram directly compared to the observed one. Following, the coefficients a_m are calculated, whereas the moment tensor M_{kl} can be calculated using the last equation. The model parameters are estimated by minimizing the difference between observed and synthetics using the least square method:

$$\Delta = \sum_{i=1}^n w_i \int [obs_i(t) - syn_i(t)]^2 dt = \min \quad (17)$$

where w_i is the weight for each station and n is the number of observations. The best solution is obtained by minimizing the equation (17).

4. Applications

The proposed methodology was applied to the largest earthquakes that occurred recently in Greece. The first two applications concern the 2001 Skyros and the 2003 Lefkada earthquakes (shallow events), while the last two concern the 2002 Karpathos and the 2006 Kythira earthquakes (deep events). These events occurred in different seismotectonic settings, fact that permits us to evaluate the reliability of the method. The employed waveforms consist of P, SV and SH phases recorded by stations of the Global Seismograph Network (GSN). A sampling frequency of 4 Hz was used for all data recorded at epicentral distances ranging from 30° to 90° . The instrument's response was deconvolved, then integrated to displacement and convolved with a band pass filter. Synthetic seismograms were generated for a point source buried in a half space using, for the shallow events, density 2.7 g/cm^3 , $v_p=6.5 \text{ km/sec}$ and $v_s=3.6 \text{ km/sec}$ for P and S waves, respectively. In addition the attenuation effect is taken into account using Futterman's (1962) operator with $t^*=1$ for P and $t^*=4$ for SH and SV waves. The source parameters of the selected earthquakes are calculated by minimizing the misfit between observed and synthetic seismograms, using the proposed methodology. Following, the results of the application of the selected events are presented.

4.1. The $M_w=6.5$ 2001 Skyros Earthquake

On July 26, 2001 (00:21 GMT) an earthquake of Magnitude $M_w=6.5$ occurred close to the Northwest coast of Skyros Island causing some damage, landslides and rockfalls. The epicenter (39.03° N , 24.27° E) is located at the end of the Southern branch of the North Anatolian Fault (NAF). The North Aegean is dominated by the North Anatolian Fault, characterised by dextral strike slip type faulting and divided in several branches. Along these different branches of NAF large earthquakes occurred the last 50 years, like the event on February 19 1968 near the Agios Efstratios Island, on January 18 1982 near the Thassos Island and on August 6 1983 near the Lemnos Island. Finally, the nearest and largest earthquake occurred on March 4 1967 which is characterised by normal type faulting (Papadimitriou, 1988). The focal mechanism of the Skyros event indicates strike slip faulting (Benetatos et al., 2002; Papadopoulos et al., 2002). To determine the source parameters of this earthquake body wave inversion modelling is applied using the proposed methodology. Broadband digital data were selected, recorded at teleseismic distances between 30° - 90° degrees with a good signal to noise ratio. Synthetic waveforms were generated using a simple trapezoidal source time function of 7 sec duration, in order to determine the components of the moment tensor and the focal depth of the mainshock. The result of the inversion was a focal mechanism indicating strike slip type faulting at a depth of 14 km. The determined fault plane solution is: $\phi=160^\circ$, $\delta=65^\circ$ and $\lambda=7^\circ$, while the seismic moment was found equal to $6 \cdot 10^{25} \text{ dyn}\cdot\text{cm}$. The result of this procedure is presented in figure 1.

4.2 The $M_w=6.3$ 2003 Lefkada Earthquake

On 14 August 2003 (05:14 GMT) an earthquake of magnitude $M_w=6.3$ occurred close to the NW coast of Lefkada Island causing some damage, landslides and ground fissures, mainly at the northern part of the island. The epicenter (38.86° N , 20.56° E) is located at the northern part of the Kefallinia-Lefkada dextral transform fault zone which forms the transition zone between the Hellenic subduction zone to the south and the collision zone to the north (Papadimitriou et al., 2006). The area was affected by numerous earthquakes since the antiquity (Papazachos and Papazachou, 2002). Most of these events were located close to the recent one, producing damages with the same characteristics (landslides, rockfalls, liquefaction effect, ground fissures). The focal mechanism of this event indicates strike slip faulting along the NE-SW direction (Papadopoulos et

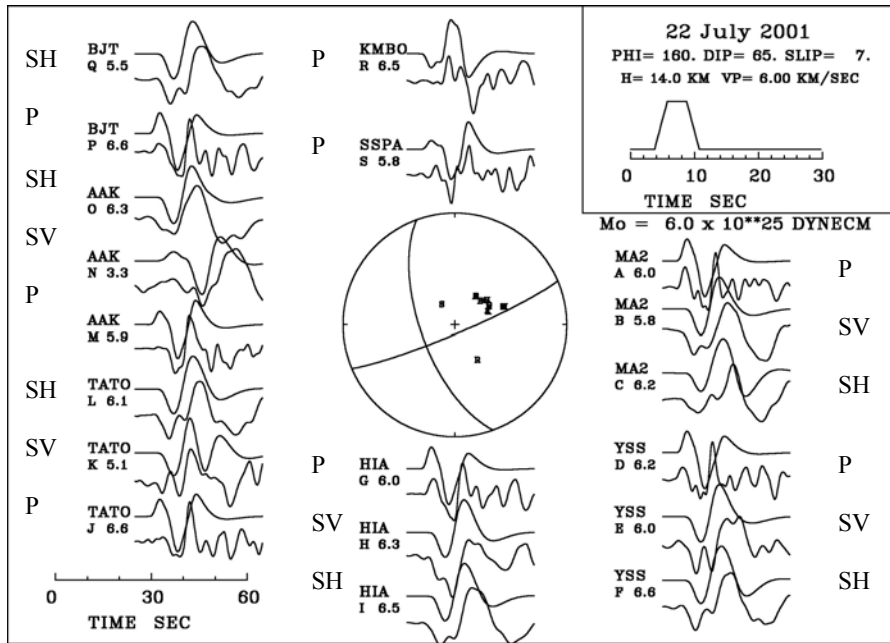


Figure 1. Body wave modeling of the 2001 Skyros earthquake.

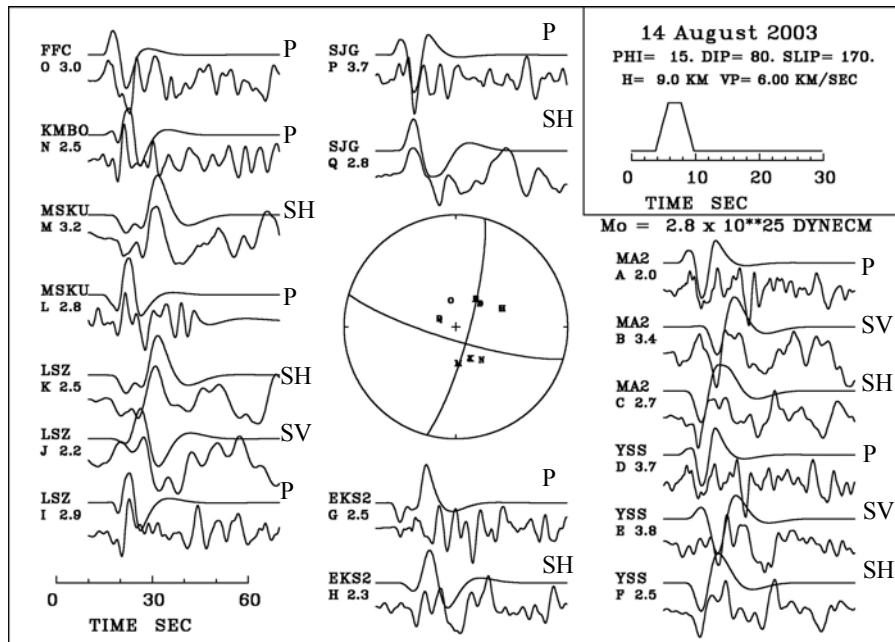


Figure 2. Body wave modeling of the 2003 Lefkada earthquake.

al., 2003; Zahradnik et al., 2005; Benetatos et al., 2005) and is in agreement with the general type faulting of the area (Anderson and Jackson 1987; Papadimitriou, 1988; Louvari et al., 1999). As a first step, synthetic waves were generated using a simple trapezoidal source time function, in order to determine the components of the moment tensor and the focal depth of the mainshock. The source parameters of the Lefkada earthquake were calculated using as total source duration 6 sec. Body wave inversion revealed strike slip type faulting. The best fit solution is: $\phi=15^\circ$, $\delta=80^\circ$ and $\lambda=170^\circ$, while the focal depth is 9 km and the seismic moment $2.8 \cdot 10^{25}$ dyn-cm (figure 2), in agreement to the results obtained by Benetatos et al. (2005) and by Papadimitriou et al. (2006). Papadimitriou et al. (2006) used a complex source time function for the Lefkada earthquake. In the present study this procedure was not followed, since the main objective was to retrieve the depth and the focal mechanism of the event.

4.3 The $M_w=6.2$ Karpathos Earthquake

On 22 January 2002 (04:53 GMT) an earthquake of Magnitude $M_w=6.3$ occurred west of the Karpathos Island (Southern Greece), where no damages are imported. The hypocenter (35.56°N , 26.73°E , $H=90\text{km}$) is located on the Hellenic subduction zone. The area is characterized by several deep events that occurred in the past, but this is the first instrumentally recorded deep event in the area. The main event was followed by a small number of aftershocks. A simple trapezoidal source time function with duration of 6 sec was applied to calculate the focal mechanism and the depth of the main event. The inversion process resulted strike slip type faulting at a depth of 90 km. The best fit fault plane solution is: $\phi=95^\circ$, $\delta=89^\circ$ and $\lambda=50^\circ$ with seismic moment equal to $2.6 \cdot 10^{25}$ dyn-cm (figure 3). The result obtained by the inversion shows a good fit between the observed and the synthetic waves, indicating that the source time function is not complex. Furthermore, the deep pP and sP phases are evident and well-modeled.

4.4 The $M_w=6.7$ Kythira Earthquake

On 8 January 2006 (13:34 GMT) an earthquake of Magnitude $M_w=6.7$ occurred close to the Northeast cost of Kythira Island (Southern Greece) causing some damages landslides and rockfalls. The hypocenter (36.21°N , 23.40°E , $H=65\text{ Km}$) is located on the Hellenic subduction zone which characterizes the Southern part of Greece. This event is one of the largest earthquakes, after the event of 1903, which occurred in the same area. Previous works indicate the existence of a seismic gap in this region (Wyss and Baer, 1981). The main event was followed by a small number of aftershocks, with maximum magnitude $M_w = 5.5$. The major part of the seismic activity in this region is related to the active subduction zone along the Hellenic Arc, as well as the backarc area. Consequently, the area presents complex deformation, where the southern part of the Aegean region is moving towards the southwest at approximately 40 mm/yr (Kahle et al., 1996). The area is characterized by active faulting with an almost vertical orientation in relation to the subduction zone. The components of the moment tensor and the focal depth of the mainshock were determined using a simple trapezoidal source time function with duration of 7 sec. Thrust type faulting was revealed after applying body wave inversion. The obtained focal mechanism is $\phi=205^\circ$, $\delta=45^\circ$ and $\lambda=55^\circ$, the seismic moment $8.4 \cdot 10^{25}$ dyn-cm, while the focal depth was equal to 65 km (figure 4). The evident and well-constrained deep pP and sP phases show that the focal depth is well determined. The obtained focal mechanism is in agreement with the one proposed by the Harvard CMT solution.

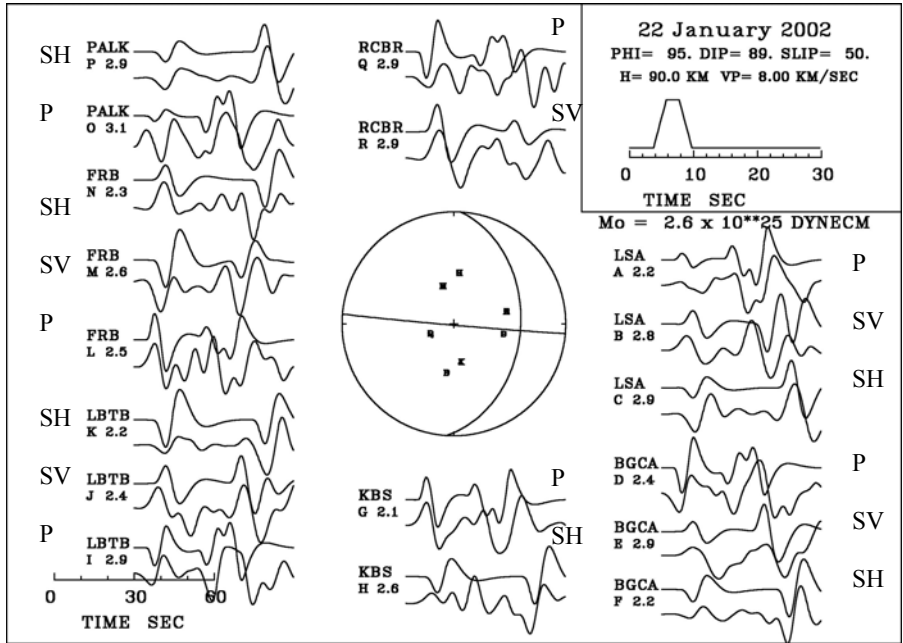


Figure 3. Body wave modeling of the 2002 Karpathos earthquake.

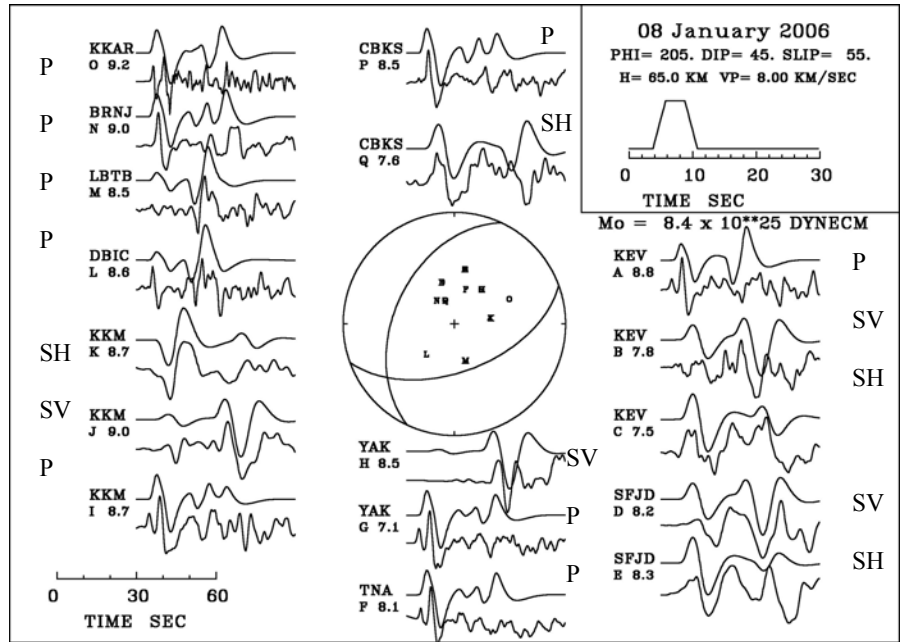


Figure 4. Body wave modeling of the 2006 Kythira earthquake.

5. Conclusions

The source parameter determination of an earthquake can be obtained using a moment tensor inversion method. For this purpose, Green functions can be generated for five elementary type faulting. The linear combination of these Green functions can produce synthetics that can directly be compared to the corresponding observed ones. The components of the seismic moment tensor were determined, using the generalized inverse technique based on the SVD method. The proposed methodology was applied to the recently largest events that occurred in Greece using teleseismic broad-band digital data between 30° and 90°. The obtained results are generally compared with those obtained by other methods. In addition, using P, SH and SV body waves with a good signal/noise ratio, accurate source parameters are obtained, even in the case that few stations are taken into account.

The methodology that was developed in this study is applied to the four largest events that occurred recently in Greece. Concerning the 2001 Skyros and the 2003 Lefkada shallow events, they indicate strike slip type faulting. On the other hand, the seismic parameters of the 2002 Karpathos and 2006 Kythira events revealed reverse focal mechanism at depths equal to 90 km and 65 km, respectively. It is the first time that modeling can be applied for large events occurring at these depths in the Southern Aegean. These events are located on the subduction zone that characterizes the region.

6. References

- Aki & Richards P.G 1980. *Quantitative Seismology*, W.H. Freeman, San Francisco, 1, 55.
- Anderson, H., Jackson, J., 1987. Active tectonics of the Adriatic region, *Geophys. J. R. Astron. Soc.* 91, 937-983.
- Benetatos, C., Roumelioti, Z., Kiratzi, A., and Melis, N., 2002. Source parameters of the M 6.5 Skyros Island (North Aegean Sea) earthquake of July 26, 2001, *Annali di Geofisica* 45, 513-526.
- Benetatos, C., Kiratzi, A., Roumelioti, Z., Stavrakakis, G., Drakatos, G., Latoussakis, I., 2005. The 14 August 2003 Lefkada Island (Greece) earthquake: Focal mechanisms of the mainshock and of the aftershocksequence, *Journal of Seismology*, 9, 171-190.
- Brune, J., 1970. Tectonic stress and spectra of seismic shear waves *J. Geophys. Res.*, 75, 4997-5002.
- Fukushima, T., Suetsugu, D., Nakanishi, I., and Yamada, I., 1989. Moment tensor inversion for near earthquake using long - period digital seismogram, *J. Phys.Earth*, 37, 1 – 29.
- Futtermann, W., 1962. Dispersive body waves, *J. Geophys. Res.* 67, 5279-5291.
- Hartzell, S., Heaton, T., 1983. Inversion of strong ground motion and teleseismic waveform data for the fault rupture history of the 1979 Imperial Valley, California earthquake, *Bull.Seism.Soc Am.* 76, 649-674.
- Jost, M., Hermann, R., 1989. A student's Guide to and Review of Moment Tensors, *Seismological Research Letters*, 60 (2), 37 – 57.
- Kahle H.-G., Muller M. V., Veis G., 1996. Trajectories of crustal deformation of western Greece from GPS observations 1989-1994. *Geophys. Res. Lett.*, 23 (6), 667-680.
- Kanamori, H., 1972. Determination of effective tectonic stress associated with earthquake faulting, the Tottori earthquake of 1943, *Phys. Earth. Planet. Interiors*, 5, 426-434.
- Kikuchi, M., Kanamori, H., 1982. Inversion of complex body waves, *Bull. Seism. Soc. Am.*, 72, 491 – 506.

- Kikuchi, M., Kanamori, H., 1986. Inversion of complex body waves II, *Phys. Earth Planet. Interiors*, **43**, 205 – 222.
- Kikuchi, M., Kanamori, H., 1991. Inversion of complex body waves – III, *Bull. Seism. Soc. Am.*, **81**(6), 2335 – 2350.
- Lanczos, C., 1950. An iteration method for the solution of the eigenvalues problem of linear differential operators, *J. Res. N. B. S.*, **45**, 255 – 282.
- Langston, C., Helmberger, D., 1975. A procedure of modelling shallow dislocation sources, *Geophysics, J. R. Astr. Soc.*, **42**, 117-130.
- Langston, C., 1981. Source Inversion of seismic waveforms: The Koyna, India, earthquakes of 13/09/1967, *Bull. Seism.Soc. Am.*, **71** (1), 1 – 24.
- Langston, C., Barker, J., Pavlin, G., 1982. Point – source inversion techniques, *Physics of the Earth and Planetary Interiors*, **30**, 228 – 241.
- Lay, T., Wallace, T., 1995. *Modern Global Seismology*, Press, New York.
- Louvari, E., Kiratzi, A., Papazachos, B., 1999. The Cephalonia transform fault and its continuation to western Lefkada Island, *Tectonophysics*, **308**, 223-236.
- Madariaga, R., Papadimitriou, P., 1985. Gaussian beam modeling of upper mantle phases, *Annales Geophysicae* **3**, 6, 799-812.
- Meju, M., 1994. *Geophysical Data Analysis: Understanding Inverse Problem Theory and Practice*, Course Notes Series, Volume 6, S.N. Domenico.
- Menke, W., 1984. *Geophysical Data Analysis, Discrete Inverse Theory*, Academic, San Diego, CA
- Nabelek, J., 1984. *Determination of Earthquake source parameters from inversion of body waves*, PhD Thesis, MIT.
- Papadimitriou, P., 1988. *Etude de la structure du manteau superieur de l' Europe et modelisation des ondes de volume engendrees par des seismes egeens*, Doctorat de l' Universite Paris VII, Paris France.
- Papadimitriou, P., Kaviris, G., and Makropoulos, K., 2006. The $M_w=6.3$ Lefkada earthquake (Greece) and induced stress transfer changes, *Tectonophysics*, **423**, 73-82.
- Papadopoulos, G., Ganas, A., and Plessa, A., 2002. The Skyros earthquake (M_w 6.5) of 26 July 2001 and precursory seismicity patterns in the North Aegean Sea, *Bull. Seism. Soc. Am.*, **92**, 312-322.
- Papadopoulos, G., Karastathis, V., Ganas, A., Pavlides, S., Fokaefs, A., and Orfanogiannaki, K., 2003. The Lefkada Ionian Sea (Greece), shock (M_w 6.2) of 14 August 2003: Evidence for the characteristic earthquake from seismicity and ground failures, *Earth Planets Space*, **55**, 713-718.
- Papazachos, B., and Papazachou, C., 2002. *The earthquakes of Greece*. Ziti Publ. Thessaloniki, Greece.
- Zahradnik, J., Serpetsidaki, A., Sokos, E., and Tselentis, G., 2005. Iterative deconvolution of regional waveforms and a double-event interpretation of the 2003 Lefkada earthquake, Greece, *Bull. Seismol. Soc. A.*, **95**, 159-172.
- Wyss, M., and Baer M., Earthquake hazard in the Hellenic arc, in *Earthquake prediction*, Maurice Ewing Series, vol. 4, edited by D. W. Simpson, and P. G. Richards, pp. 153-172, Amer. Geophys. Union., 1981.